

MA-LINE INSTRUMENTS
www.ma-line.com

INDEX

DIGITAL ANEMOMETER (CFM) WITH FLEXIBLE NECK..... 7-4

DIGITAL REFRIGERANT PRESSURE AND TEMPERATURE CHART 7-2

PORTABLE GAS LEAKAGE INDICATOR — NATURAL GAS AND PROPANE 7-4

THERMOMETERS

 DIGITAL

 180° ROTATING HEAD DESIGN..... 7-5

 DUAL PROBE WITH CASE 7-3

 HAND HELD..... 7-5

 POCKET 7-6

 POCKET THERMO-HYGROMETER 7-5

HORIZONTAL SOLAR..... 7-3

HYGRO-THERMOMETER WITH CLOCK — INDOOR/OUTDOOR..... 7-6

INFRARED

 POCKET COMBINATION WITH LED FLASHLIGHT 7-2

 WITH 16" LONG FLEXIBLE NECK..... 7-2

 WITH DUAL LASER TARGETING 7-4

POCKET DIAL — ADJUSTABLE 7-6

REFRIGERATOR/FREEZER AND OVEN..... 7-6

REMOTE READING VAPOR TENSION 7-3

Expert Service. Quality Products. Since 1960.

INFRARED THERMOMETER WITH 16" LONG FLEXIBLE NECK


Ideal for temperature measurement of hard to reach areas.

8:1 distance to spot ratio.

Temperature range: -58°F to 1112°F (-50°C to 600°C)

Features

- Built in laser pointer
- F/C selectable
- Automatic data hold
- Auto power off
- Backlight
- Comes with case
- 9V battery included

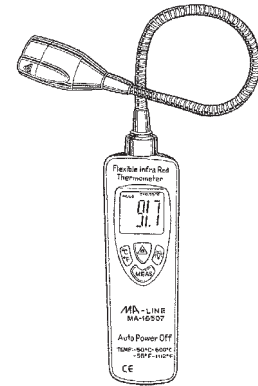

ITEM #	MODEL	DESCRIPTION
770180	MA-16507	Infrared Thermometer


POCKET COMBINATION INFRARED THERMOMETER AND LED FLASHLIGHT

1:1 distance to spot ratio.

Temperature range: -27°F to 428°F (-33°C to 220°C)

Features

- Protective infrared lens cap
- Automatic data hold
- Auto off
- No laser sight

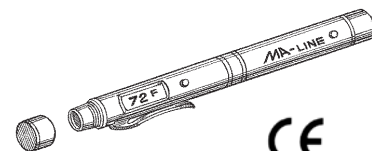


ITEM #	MODEL	DESCRIPTION
770170	MA-LS4	Pocket Infrared Thermometer and LED Flashlight

DIGITAL REFRIGERANT PRESSURE AND TEMPERATURE CHART

Features

- Compact digital pressure temperature chart
 - Pocket size device offers fast and accurate temperature references on a large easy to read LCD display
 - Automatic power down feature shuts unit OFF Five minutes after the last command to insure extended battery life
- Pressure Units – PSI, BAR and Mpa
 Temperature Units – Fahrenheit and Celsius
 Includes – Manual, Soft Case, 3V CR2032 Battery



ITEM #	MODEL	DESCRIPTION
770168	MA-12834	Digital Pressure/Temperature Chart

The MA-12834 displays accurate pressure and temperatures for 61 refrigerants:

- | | |
|--------------------------------------|--------------------------------------|
| R11, R12, R13, R21, R22, R23, R32 | R407A, R407B, R407C, R407D, R408A, |
| R113, R114, R115, R116, R123, R124, | R409A, R410A, R410B, R411A, R411B, |
| R125, R134, R134A, R141B, R142B, | R412A, R413A, R414A, R414B, R501, |
| R143, R143A, R152A, R176 R218, R290, | R502, R503, R504, R507, R508B, R509A |
| R401A, R401B, R401C, R402A, R402B, | R600, R600A, R601, R601A, R717, R744 |
| R403A, R403B, R404A, R405A, R406A, | |


DUAL PROBE DIGITAL THERMOMETER WITH CASE

Temperature range: -328°F to 2498°F (-200°C to 1370°C)

Great for Super Heat. Available Computer Software Package allows downloadable information from a digital thermometer to a PC.

Features

- LCD display
- Low battery indicator
- Dual display (T1-T2)
- Auto power off
- Maximum average minimum hold, related functions
- Resolution 0.1°F (0.1°C)
- Battery – 9V
- Size – 7" × 3-1/2"

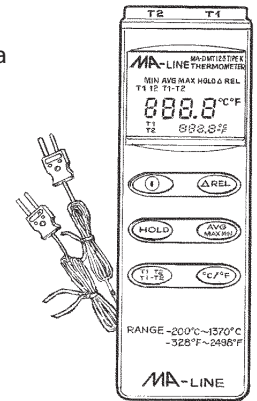


ITEM #	MODEL	DESCRIPTION
770184	MA-DMT123	Dual Probe Thermometer

HORIZONTAL SOLAR THERMOMETER

Temperature range: -58°F to 302°F (-50°C to 150°C)

Features

- 1-1/2" L × 1/2" H display
- Easily switchable for °F/°C applications
- 48" capillary




ITEM #	MODEL	DESCRIPTION
770144	MA-1001S	Solar Thermometer

REMOTE READING VAPOR TENSION THERMOMETERS

Temperature range: -40°F to 60°F (-40°C to 15°C)

These thermometers can be calibrated.

ITEM #	MODEL	DESCRIPTION
770152	MA-50ABF	Vapor Tension Thermometer – Back Flange Mount All Stainless Steel Case, 2" Dial, 60" Capillary, Back Connect
770146	MA-60A	Vapor Tension Thermometer – Strap Mount All Stainless Steel Case, 2-1/2" Dial, 60" Capillary, Bottom Connect



MA-50ABF



MA-60A


INFRARED THERMOMETER WITH DUAL LASER TARGETING

12:1 distance to spot ratio.

Temperature range: -58°F to 1202°F (-50°C to 650°C)

Features

- Dual laser targeting
- Wide temperature range
- Switchable between °F and °C
- Max display and High/Low alarm
- Automatic data hold
- Auto power off
- Backlight
- Overrange indicator
- Double molded housing design
- Includes 9V battery and soft case



Specifications

Function	Range
Resolution	0.1°F/°C up to 1000°; 1.0°F/°C over 1000°
Emissivity	Adjustable 0.1 to 1.000
Battery	9V (1 pc)


ITEM #	MODEL	DESCRIPTION
770181	MA-16506	Infrared Thermometer

DIGITAL ANEMOMETER (CFM) WITH FLEXIBLE NECK

Temperature range: 14°F to 140°F (-10°C to 60°C)

Features

- Measures air flow
- Sets area of measurement
- Measures air velocity and temperature
- Degrees F/C switchable
- 6 selectable units of measurement
- Data hold/max/min
- Mode store
- 16" gooseneck detector easily measures hard-to-reach areas
- 4 digit display of air velocity in meters/sec, ft/min, km/h, MPH, knots and CFM
- Low battery indication
- Auto power off
- Complete with 9V battery and carrying case



Specifications

Function	Range
meters/sec	0.60-30.00
ft/min	119-5900
km/h	2.2-108.0
MPH	1.4-67.0
Knots	1.2-58.0
CFM	0-999,900ft ³ /min


ITEM #	MODEL	DESCRIPTION
770169	MA-12843	Digital Anemometer (CFM) with Flexible Neck

PORTABLE GAS LEAKAGE INDICATOR — NATURAL GAS AND PROPANE

ITEM #	MODEL	DESCRIPTION
770172	MA-NG2000-A	Portable Gas Indicator

Specifications

Function	Range
Power	DC
Battery Size	2AA
Consumption	200mA
Detectable Gas	Natural Gas Petroleum Gas
Humidity	95RH or Lower
Duration of Use	Approx. 4 hours Continuously



DIGITAL POCKET THERMO-HYGROMETER

Temperature range: -4°F to 122°F (-10°C to 50°C)

Humidity – 10% to 95% RH

Features

- Dual display of temperature and humidity
- Minimum/Maximum readings for temperature and humidity
- F/C selectable switch
- On/Off switch
- Compact size




ITEM #	MODEL	DESCRIPTION
770117	MA-16529	Thermo-Hygrometer

DIGITAL THERMOMETER WITH 180° ROTATING HEAD DESIGN

Temperature range: -58°F to 302°F (-50°C to 150°C)

Features

- Includes on/off switch and automatic shut-off after 10 minutes
- Temperature accuracy is rated a 2° in the center range of the unit
- Unit comes complete with battery
- Unit has the ability to rotate the head of the unit a full 180°




ITEM #	MODEL	DESCRIPTION
770164	MA-RT340	Digital Thermometer

HAND HELD DIGITAL THERMOMETER

Temperature range: -58°F to 392°F (-50°C to 200°C)

Features

- Wide measurement range
- F/C switchable
- Minimum/Maximum temperature memory
- Data hold function
- Stainless steel probe
- Magnetic attachment
- Never needs to be calibrated
- Large and clear digital display

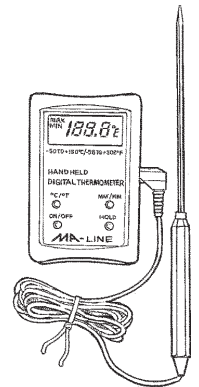

ITEM #	MODEL	DESCRIPTION
770162	MA-RT900	Hand Held Digital Thermometer

MA-LINE INSTRUMENTS


www.ma-line.com

INDOOR/OUTDOOR HYGRO-THERMOMETER WITH CLOCK

Temperature Range (Indoor) – -58°F to 158°F (-50°C to 70°C)
 Temperature Range (Outdoor) – -58°F to 158°F (-50°C to 70°C)

Features

- Large LCD display shows both indoor and outdoor temperature and humidity
- Maximum and minimum temperature and humidity memory function
- Daily reset of min/max records function with internal clock
- Instant Fahrenheit/Centigrade switch
- Wall mount or table design




Specifications

Function	Range
Humidity	20% to 90%
Sensor Cable	120"
Battery (included)	1 – AAA (included)

ITEM #	MODEL	DESCRIPTION
770182	MA-BDHTR	Indoor/Outdoor Hygro/ Thermometer with Clock

REFRIGERATOR/FREEZER AND OVEN THERMOMETERS

ITEM #	MODEL	DESCRIPTION
770156	MA-HRFT1	Horizontal refrigerator/freezer thermometer, -40°F to 80°F (-40°C to 30°C)
770160	MA-SUT45	Stick-up thermometer, -20°F to 120°F (-30°C to 50°C)

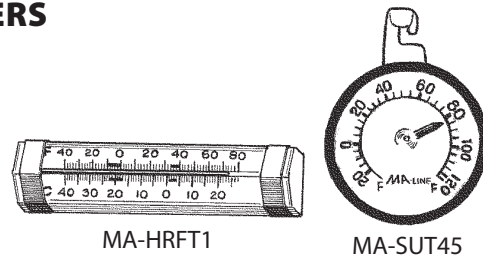

MA-HRFT1


MA-SUT45

POCKET DIGITAL THERMOMETER

Temperature range: -40°F to 392°F (-40°C to 200°C)

Features

- New case design
- Stainless steel stem
- High and low temperature recall
- Water resistant
- Auto off
- Data hold

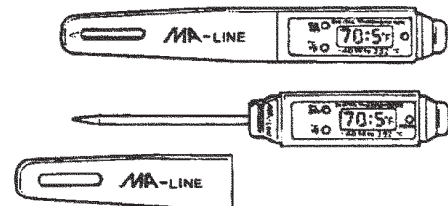

ITEM #	MODEL	DESCRIPTION
770166	MA-PDT392B	Pocket Digital Thermometer

ADJUSTABLE POCKET DIAL THERMOMETER

- With case and 5" stem, 1" dial
- 12 to a display carton
- Fahrenheit scale

ITEM #	MODEL	DESCRIPTION
770158	MA-PT160	Adjustable Pocket Dial Thermometer

